


FootfallCam


Smart BusController™

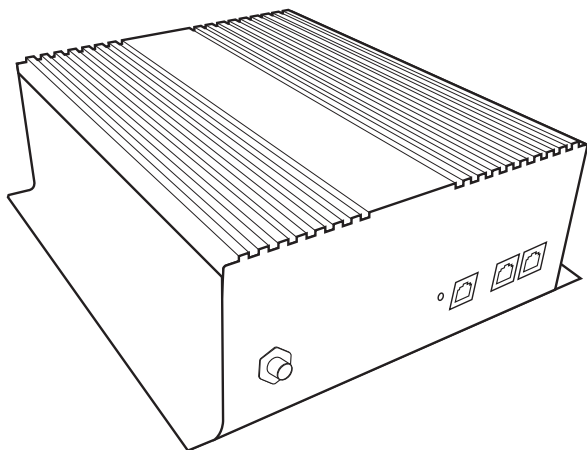

Installation Guide

Part 1: Remove Battery Insulating Tab

**Applicable for battery-backed model only.*

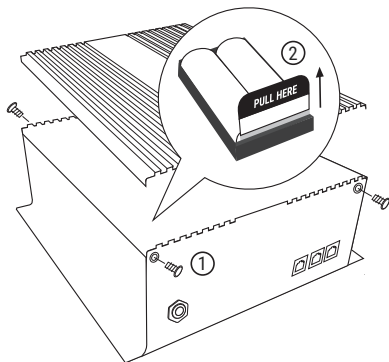

1) Detach Case

Detach the top cover by removing the upper screws on the case.


2) Remove Insulating Tab

Remove the insulating tab attached to the battery connector by pulling it vertically.

3) Close Case

Screw the top cover back into the position.

Part 2: Fasten GPS and 4G Antenna

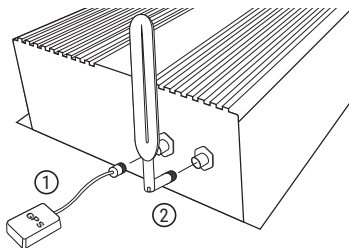

1) Fasten GPS Antenna

Fasten GPS antenna into the first connector port.

2) Fasten 4G Antenna


Fasten 4G antenna into the second connector port.

3) Connect to Counter

Run a Cat5e network cable from any of the two PoE ports to counter.

4) Power Up

Plug in the included power cable into power port with 12/24V DC input with minimum 24 AWG wire thickness.

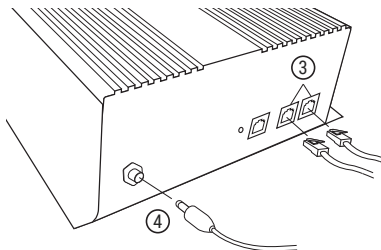

Part 2: Led Light Indications

LED	Messages
No Light	Device is not powered up Check if the power cable is plugged in correctly to the power port.
Green	Connecting to Internet/ Network issue Check if the 4G antenna and SIM card are fitted correctly. Ensure your data plan is active.
Purple	Connected to Internet but Poor GPS reception Check if the GPS antenna is plugged in correctly.
Red	Initialising/ System failed to boot Reboot the acounter by plug again the power cable after 5 minutes. Please wait for it to turn green/ blue. If prolonged/ intermittent, please contact our support team.
Blue	Everything OK



IMPORTANT

If LED does not remain blue 15 mins after power on, please perform diagnosis through debug port or contact our support team. Kindly refer to the Troubleshooting Guide at below.

FOR MORE INFORMATION, PLEASE REFER TO:



User Manual For
FootfallCam Smart Bus Controller



Troubleshooting Guide For
FootfallCam Smart Bus Controller