

Low-Maintenance Staff Exclusion Tag

# Fabric Staff Tag™



Product Code: FC-FAC41 | FC-FAC42 | FC-FAC43

## EXCLUDING STAFF GOING IN AND OUT OF PREMISE

- Visible from many angles
- Live Visualisation of Counting
- Low Cost, no battery required
- Wash Durability and Stain Resistance (not applicable for FC- FAC43)

## STAFF EXCLUSION USING TIME-OF-FLIGHT TECHNOLOGY

- Using latest Time-of-flight technology to exclude any person wearing the tag from being counted. To promote privacy and security, the counter anonymizes the staff exclusion tag's identification so that it is not traceable.


## HOW TO WEAR FABRIC TAG

1. Determine the position of the fabric that is suitable to place on the shoulder of your staff uniform. The ideal position of the Staff Tag is placed at the end of the collarbone, facing upward, to make sure it is fully visible from the top view without blockage. Apply the fabric tag to your staff uniform with sewing, iron (heat lamination), or 'peel and stick'.
2. Run Walk Test with access to FootfallCam 5D Pro™, the Fabric Staff Tag must be exposed to the counter directly (line of sight). The coverage area would be with the centre of live view as the origin.

## TECHNICAL DATA

Compatible with	FootfallCam 5D Pro™ FootfallCam 3D Mini V3™
Variants	FC- FAC41: Sewing Type (Silver) FC- FAC42: Iron Type (Silver/ Black) FC- FAC43: Peel & Stick Type (Silver)
Application Material	FC- FAC41: 100% cotton / knitted FC- FAC42: 65% polyester / 35% cotton FC- FAC43: polyester or cotton
Washing Cycle	60 cycles with machine Wash warm 40°C (105°F) Do NOT bleach or dry-clean Cool iron 100°C (230°F)

## PRODUCT DIMENSION

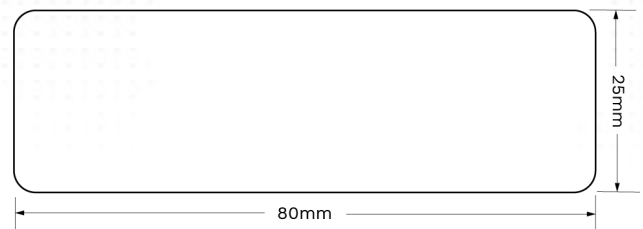

## COVERAGE AREA FOR STAFF EXCLUSION

Ceiling Height (m)	Coverage Area (m) (Horizontal FOV x Vertical FOV)	TOF Sensor FOV (Degree)
2.5	0.83 x 0.83 m	45
3.0	1.25 x 1.25 m	45
3.5	1.67 x 1.67 m	45